Programming Languages & Translators

INTRODUCTION TO COMPILER

Baishakhi Ray

Fall 2019

These slides are motivated from Prof. Calivin Lin, UT Austin

What is a Compiler?

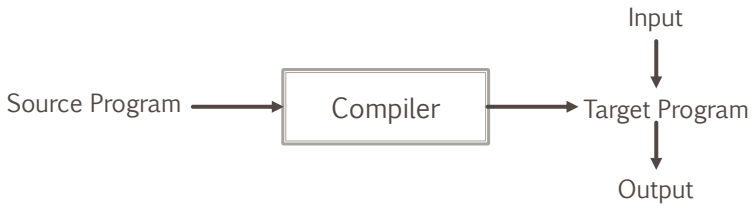

A Hybrid Compiler

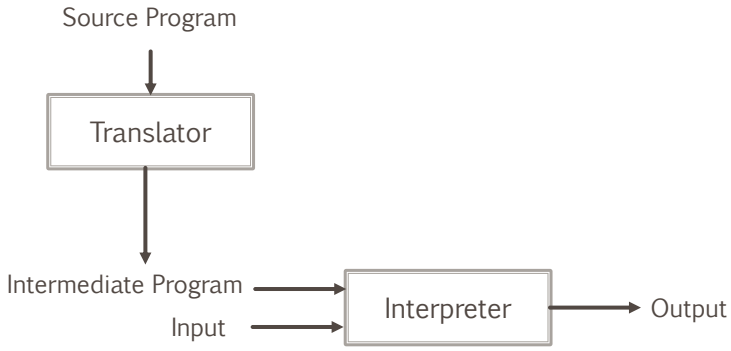

A language processing system

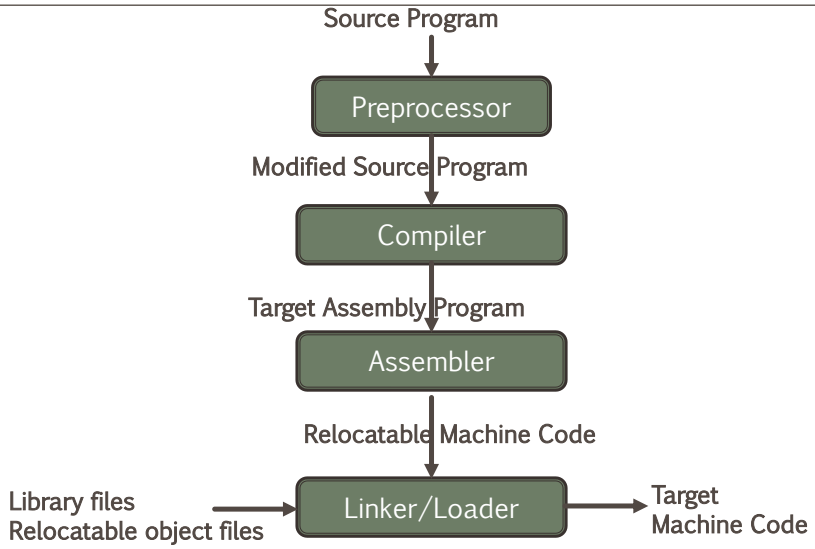

Structure of a Typical Compiler

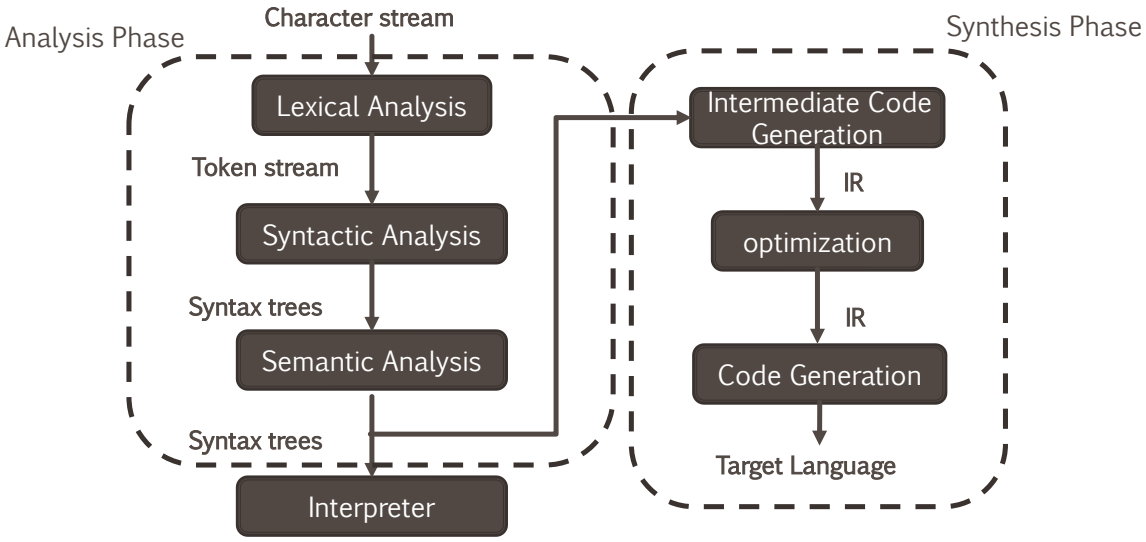

Input to Compiler

```
for i = 1 to 10 do
a[i] = x * 5;
```

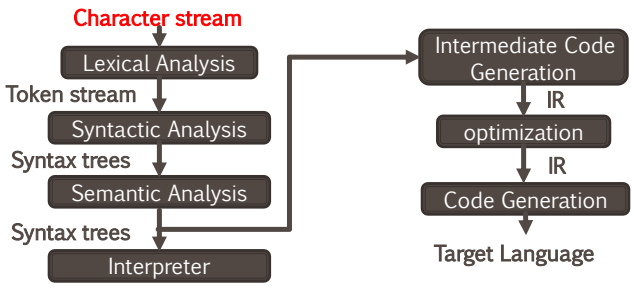


```
f o r i = 1 t o 1 0 d o a [ i ] = x * 5 ;
```

Lexical Analysis

Break character stream into tokens ("words")

```
for i = 1 to 10 do
a[i]  = x * 5;
```

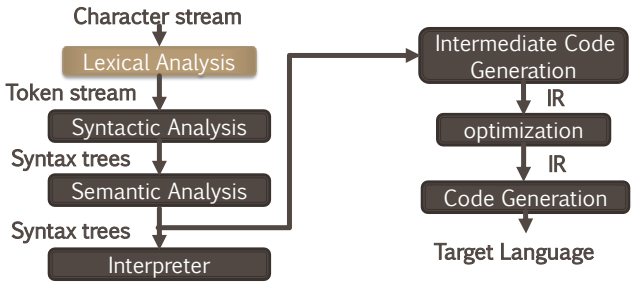


```
for id(i) <=> number(1) to number(10) do
id(a) <[> id(i) <]>  <=> id(x) <*> number(5) <;>
```

Compiler Data Structure

- Symbol Tables
  - Compile-time data structures
  - Hold names, type information, and scope information for variables
- Scopes
  - A name space
    e.g., In Pascal, each procedure creates a new scope
    e.g., In C, each set of curly braces defines a new scope
  - Can create a separate symbol table for each scope

Lexical Analysis

Break character stream into tokens (“words”)

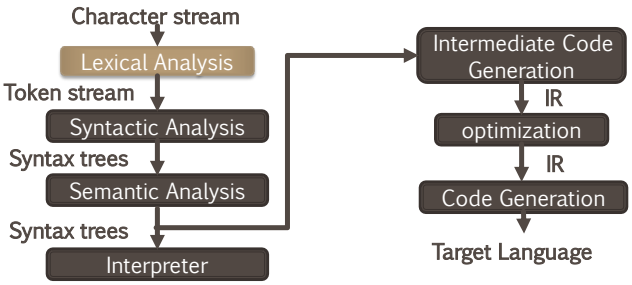


```
for i = 1 to 10 do
a[i]  = x * 5;
```

1	i	…
2	a	…
3	x	…

Symbol Table

```
for id(i) <=> number(1) to number(10) do
id(a) <[> id(i) <]>  <=> id(x) <*> number(5) <;>
```

```
for <id,1> <=> number(1) to number(10) do
<id,2> <[> <id,1> <]>  <=> <id,3> <*> number(5) <;>
```

Syntactic Analysis (Parsing)

Impose Structure to Token Stream

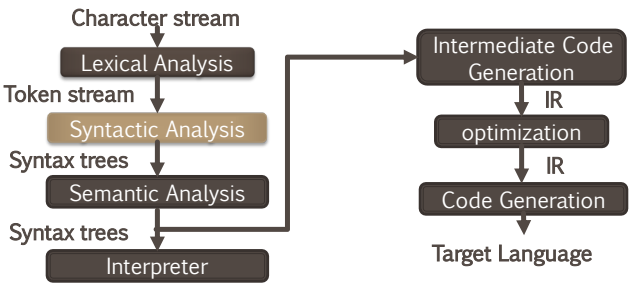


```
for i = 1 to 10 do
a[i]  = x * 5;
```

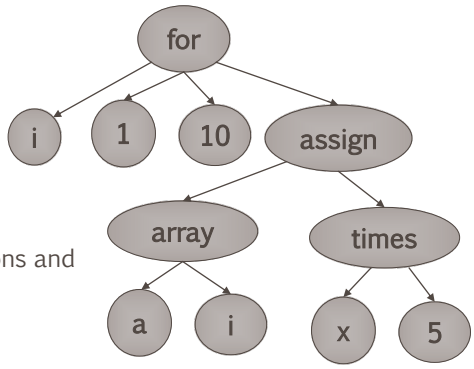

In a typical syntax tree, intermediate nodes represent operations and Leaf node represent the arguments of the operations.

Semantic Analysis

Determine whether source is meaningful

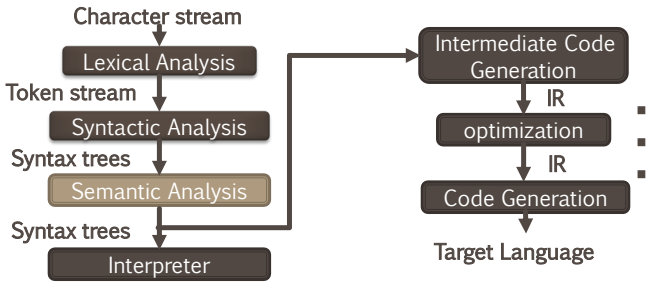


```
for i = 1 to 10 do
a[i]  = x * 5;
```

- Check for semantic errors
- Check for type errors
- Gather type information for subsequent stages
  - Relate variable uses to their declarations

Usage of Symbol Tables

- For each variable declaration:
  - Check for symbol table entry
  - Add new entry (parsing)
  - add type info (semantic analysis)
- For each variable use:
  - Check symbol table entry (semantic analysis)

Intermediate Code Generation

Transform AST into low-level intermediate representation (IR)

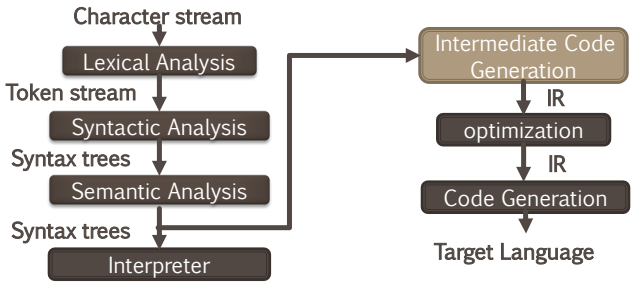

Simplifies the IR

- Removes high-level control structures:
  - for, while, do, switch
- Removes high-level data structures:
  - arrays, structs, unions, enums

Intermediate Code Generation

Transform AST into low-level intermediate representation (IR)

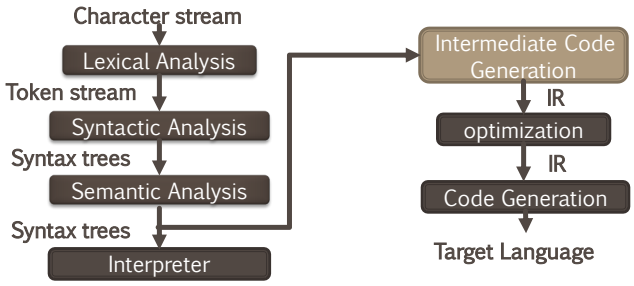

One possible result is assembly-like code

- Semantic lowering
- Control-flow expressed in terms of "gotos"
- Each expression is very simple (three-address code)
  e.g., x := a * b * c

```
t := a * b
x := t * c
```

Intermediate Code Generation

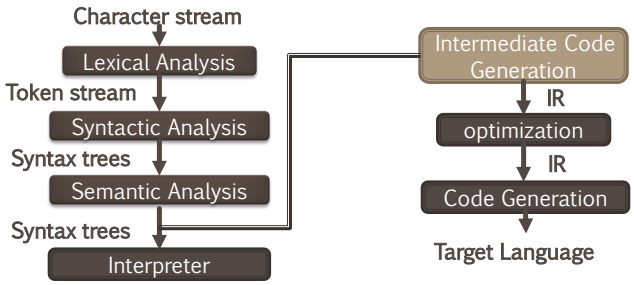

for i = 1 to 10 do
a[i] = x * 5;

```
i := 1
loop1:
      t1 := x * 5
      t2 := &a
      t3 := sizeof(int)
      t4 := t3 * i
      t5 := t2 + t4
     *t5 := t1
      i := i + 1
    if i <= 10 goto loop1
```

Optimization

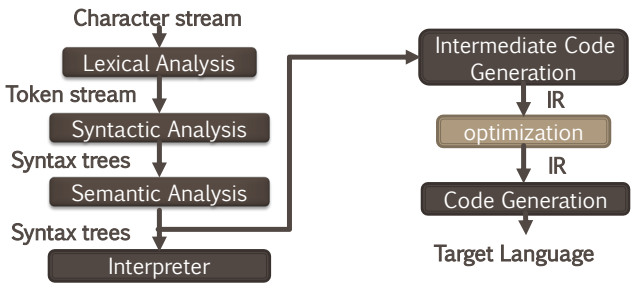

Mostly machine independent optimization
Phase aims to generate better code.

Better can be
- Faster
- Shorter
- Energy efficient
- …

Optimization

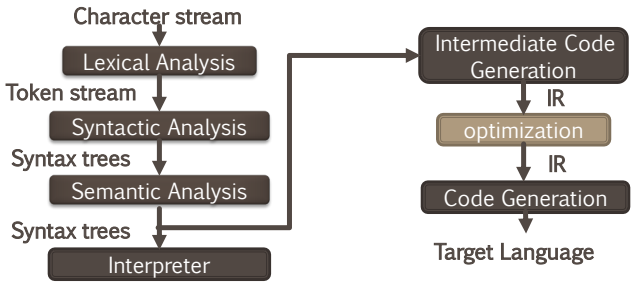

for i = 1 to 10 do
a[i] = x * 5;

```
i := 1
t3 := sizeof(int)
loop1:
      t1 := x * 5
      t2 := &a
      t3 := sizeof(int)
      t4 := t3 * i
      t5 := t2 + t4
     *t5 := t1
      i := i + 1
    if i <= 10 goto loop1
```

Low Level Code Generation

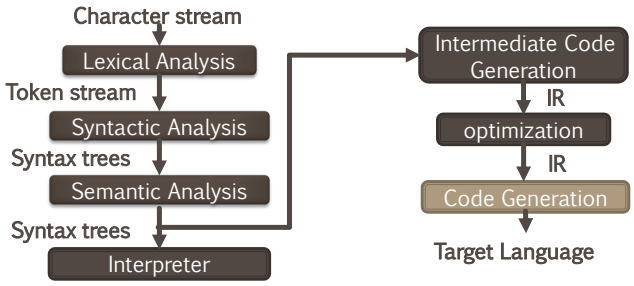

Register Transfer Language (RTL)

- Linear representation
- Typically language-independent
- Nearly corresponds to machine instructions

Example operations

- Assignment x := y
- Unary op x := op y
- Binary op x := y op z
- Call x := f()
- Cbranch if (x==3) goto L
- Address of p := & y
- Load x := *(p+4)
- Store *(p+4) := y

Why studying compiler?

Isn't it a solved problem?

- Machines keep changing
  - New features present new problems (e.g., MMX, IA64, trace caches)
  - Changing costs lead to different concerns
- Languages keep changing
  - Wacky ideas (e.g., OOP and GC) have gone mainstream
- Applications keep changing
  - Interactive, real-time, mobile

Why studying compiler?

- Values keep changing
- We used to just care about run-time performance
- Now?
  - Compile-time performance
  - Code size
  - Correctness
  - Energy consumption
  - Security
  - Fault tolerance

Value added compilation

- The more we rely on software, the more we demand more of it
- Compilers can help– treat code as data
  - Analyze the code
- Correctness
- Security

Correctness and Security

- Can we check whether pointers and addresses are valid?
- Can we detect when untrusted code accesses a sensitive part of a system?
- Can we detect whether locks are used properly?
- Can we use compilers to certify that code is correct?
- Can we use compilers to verify that a given compiler transformation is correct?

Value-added Compilation

- The more we rely on software, the more we demand more of it

- Compilers can help– treat code as data
  - Analyze the code

- Correctness
- Security
- Reliability
- Program understanding
- Program evolution
- Software testing
- Reverse engineering
- Program obfuscation
- Code compaction
- Energy efficiency

Computation important ⟹ understanding computation important

Why studying compiler?

- Compilers are a fundamental building block of modern systems
- We need to understand their power and limitations
  - Computer architects
  - Language designers
  - Software engineers
  - OS/Runtime system researchers
  - Security researchers
  - Formal methods researchers (model checking, automated theorem proving)